

# L- to X-Band STALO Unit

## General Description

Shown is the NWO5557-17 unit as an example of Nanowave's high reliability, low phase noise, DDS based C-band frequency synthesizers for ground based weather RADAR platforms. The developed C-band unit comprises in-house high reliability HMIC modules and proprietary low phase noise synthesizer and oscillator capabilities.

The unit has been designed to be readily re-banded for operation at S and X bands without change in form factor.

The C-band unit provides +23 dBm over a 150 MHz continuous tuning bandwidth with a frequency step resolution of 1 MHz. DDS frequency control enables frequency step sizes below 1Hz if required.

The source has a phase noise of -120 dBc/Hz at 100 kHz offset and a coherency of less than -60 dBc over an integration bandwidth of 10 Hz to 1 MHz.

An incorporated low-g sensitivity low phase noise internal crystal reference ensures frequency stability over temperature of less than  $\pm 1$  ppm. Ultra low phase noise of -140 dBc/Hz at 1 MHz can be provided through inclusion of a proprietary low noise DRO technology option.

Spurious signal levels less than -60 dBc at a 1MHz frequency step are guaranteed through 100 % automated spur test. All performance parameters are achieved over an operational temperature



**Fig. 1: C-Band STALO Unit**

range of 0 °C to +70 °C. Extended operational temperature ranges are available on request, e.g. -20 °C to +70 °C). The unit is compliant to IP67 and MIL-STD 883.

RS232 digital interface provides frequency control and lock detect monitor through a DB25 connector which is also used to provide the unit with a single +15 V supply rail. Amplitude, frequency and phase of the source can be controlled through the internal DDS. DC power consumption is less than 20 Watts during initial stabilization of the internal reference and falls to a steady state value of less than 18 Watts.

## Electrical Parameters


Parameter	Unit	Min	Typ	Max	Remarks
Operating Center Frequency Range	GHz	2.7		9.5	1)
Operational Bandwidth / Tuning Range			150.0		2) Within C-Band
Step Size	Hz	1.0		1.0 M	
Output Power Level	dBm	+23.0			
Phase Noise @ 100 kHz offset	dBc/H		-120.0		

	z				
Low Phase Noise Option @ 1 MHz off	dBc/H		-140.0		
	z				
Coherency 10 Hz to 1MHz	dBc		-60.0		
Spurious Level	dBc		-60.0		@ 1 MHz step
Harmonics Level	dBc		-50.0		
Frequency Stability	ppm		± 1.0		Over temperature
Frequency Switching Time	µs			50.0	
Output Return Loss	dB		15.0		

### Mechanical and Environmental Parameters

Parameter	Unit	Min	Typ	Max	Remarks
Operating Temperature Range	°C	0.0		+70.0	
Storage Temperature Range	°C	-55.0		+100.0	
Output Connector			SMA-f		
Lock Detect			TTL		Logic high
Size	Length:	cm	14.48		
	Width:	cm	4.83		
	Height:	cm	10.16		
Weather Resistant Seal			IP67		

## Measurement Data

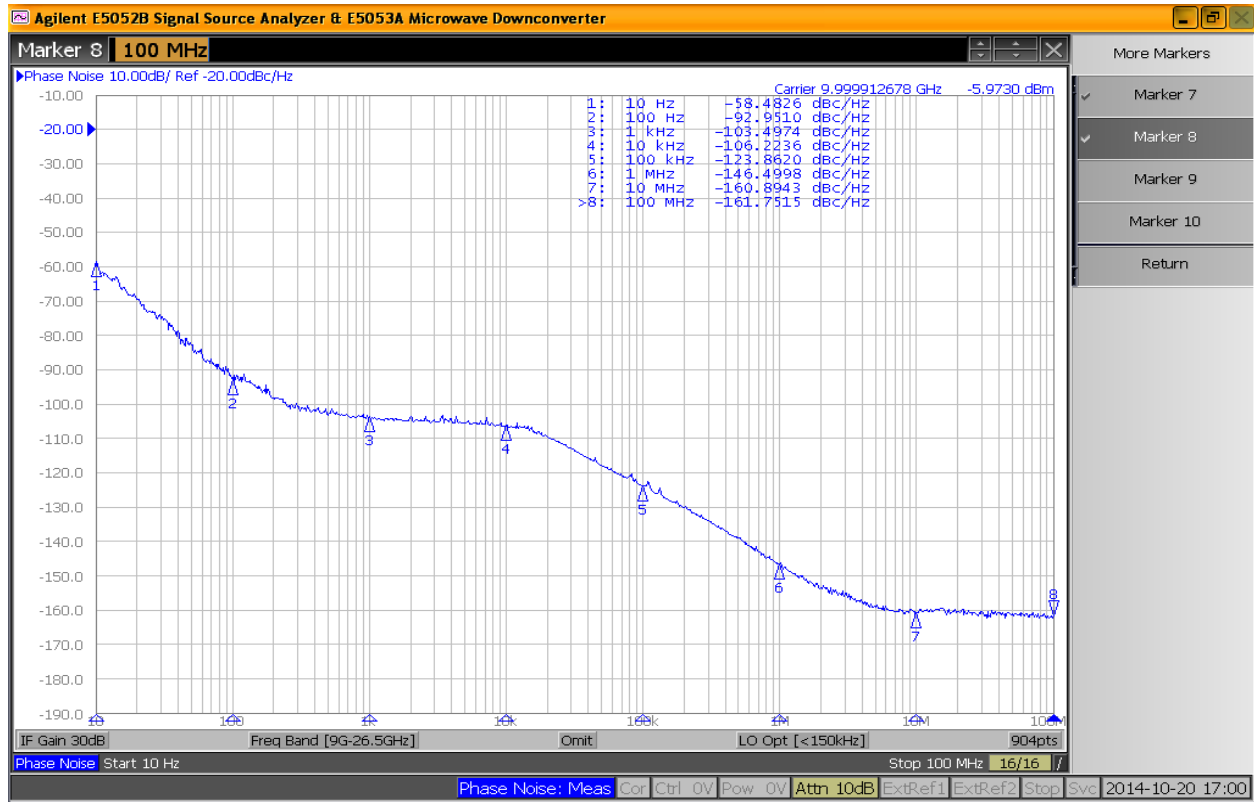

**Fig 1: Phase Noise at 10GHz**

Additional features:

- All Plating and Panting materials are RoHS compliant.
- Marking: the unit is marked with manufacturer part no., date code, and Serial Number

For further information please contact NANOWAVE Technologies Inc. at [sales@nanowavetech.com](mailto:sales@nanowavetech.com), or call at (+1) 416-252-5602.